

Ref. RGIPT/JAIS/IWD/QE/2023-24/09

Date: 17.10.2023

To,

M/s [Name of Vendor/Contractor]

Address

Email-.....

Contact No.

GSTIN:.....


Sub: Quotation enquiry for construction of Granite Counter Slab and Aluminum Partition Work in CIF Lab at RGIPT, Jais Campus.

Dear Sir,

We request you to submit your competitive rates (quotation) for construction of Granite Counter and Aluminum Partition Work in CIF Lab at RGIPT, Jais campus as per the attached BOQ as **Annexure – 1.**

Terms & Conditions:

- The rate & amount should be on FOR basis.
- Quoted rate should be inclusive of **GST & Freight charges**. Vendor are requested to only fill the required data in BOQ, no extra terms & condition should be mentioned by vendor. If he do so, then whose quotation will be summarily rejected.
- Quoted rate shall be valid for period of 2 months from the last date of submission of quotation.
- The work should be carried out as per enclosed (BOQ).
- List of preferred makes of materials approved by the Engineer-in-Charge is attached as **Annexure -2**. In case of non-availability of these makes, the Engineer-in-Charge may allow use of alternative BIS makes of materials.
- The quotation should be sent to us duly **Signed and Stamped** only in **Sealed Envelope** and super scribed as **Ref. No. RGIPT/JAIS/IWD/QE/2023-24/09, Quotation for construction of Granite Counter Slab and Aluminum Partition Work in CIF Lab at RGIPT, Jais Campus** by registered post or by hand to the office of The Chairman, Institute Works Department, RGIPT Jais, Amethi.
- The quotation should be submitted within 4 days from the date of quotation enquiry i.e., the quotation should be received on or before 20.10.2023 by 04:00 PM. Quotation received after the due date, for whatever reason, will not be considered for evaluation.
- The order will be awarded to the vendor, whose rate will be lowest in grand total.
- The Institute reserves the right to accept/reject all or any part of the offer without assigning any reason thereof.
- The total time for carrying out the work will be 30 days. The date of commencement shall be reckoned from the date of acceptance of award letter/work order.
- Your sealed quotation should be addressed to: **The Chairman, Institute Works Department, Rajiv Gandhi Institute of Petroleum Technology Jais, Mukhetiya More, Harbanshganj, Tiloi, Amethi, UP – 229304.**


Executive Engineer (Civil)

Page 1 of 6

Rajiv Gandhi Institute of Petroleum Technology, Jais, Amethi

BOQ for Granite Counter Slab & Aluminum Partition Work in CIF Lab , RG Plaza, RGIPT, Jais Campus					
S. No.	Description	Unit	Quantity	Rate (Rs.)	Amount (Rs.)
	Granite Counter Slab				
1	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete above plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	kg	72.49		
2	Centering and shuttering including strutting, propping etc. and removal of form for Lintels, beams, plinth beams, girders, bressumers and cantilevers	sqm	8.40		
3	Reinforced cement concrete work in beams, suspended floors, roofs having slope up to 15° landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases above plinth level up to floor five level, excluding the cost of centering, shuttering, finishing and reinforcement, with 1:1.5:3 (1 cement : 1.5 coarse sand(zone-II)) derived from natural sources: 3 graded stone aggregate 20 mm nominal size derived from natural sources).	cum	0.42		
4	Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level Cement mortar 1:3 (1 cement : 3 coarse sand)	sqm	3.22		
5	Providing and fixing 18 mm thick gang saw cut, mirror polished, premoulded and prepolished, machine cut for kitchen platforms, vanity counters, window sills, facias and similar locations of required size, approved shade, colour and texture laid over 20 mm thick base cement mortar 1:4 (1 cement : 4 coarse sand), joints treated with white cement, mixed with matching pigment, epoxy touch ups, including rubbing, curing, moulding and polishing to edges to give high gloss finish etc. complete at all levels. Granite stone slab all colour and texture except black, Cherry/Ruby red Area of slab over 0.50 sqm	sqm	9.21		
6	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	sqm	6.00		
7	12 mm cement plaster of mix : 1:4 (1 cement: 4 fine sand)	sqm	9.50		


S. No.	Description	Unit	Quantity	Rate (Rs.)	Amount (Rs.)
8	15 mm cement plaster on the rough side of single or half brick wall of mix : 1:4 (1 cement: 4 fine sand)	sqm	4.16		
9	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	sqm	15.61		
10	Wall painting with acrylic emulsion paint of approved brand and manufacture to give an even shade : Two or more coats on new work	sqm	15.61		
11	Dismantling tile work in floors and roofs laid in cement mortar including stacking material within 50 metres lead. For thickness of tiles 10 mm to 25 mm	sqm	3.35		
	Full Height Pre-laminated particle board aluminium partitions				
12	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS: 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing / paneling, C.P. brass / stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge. (Glazing, paneling and dash fasteners to be paid for separately) : For fixed portion Powder coated aluminium (minimum thickness of powder coating 50 micron)	kg	34.15		
13	Providing and fixing 12 mm thick pre-laminated particle board flat pressed three layer or graded wood particle board conforming to IS: 12823 Grade I Type II, in paneling fixed in aluminium doors, windows shutters and partition frames with C.P. brass / stainless steel screws etc. complete as per architectural drawings and directions of engineer-in-charge. Pre-laminated particle board with decorative lamination on both sides	sqm	10.15		
A	Sub-Total Amount (Sr. No. 1 to 13)				
B	GST @ 18%				
	Total Amount inclusive of GST (S. No. A+B)				

LIST OF PREFERRED MAKES


SL.NO.	MATERIALS	MANUFACTURER/BRAND/MAKE
1	CEMENT (OPC / PPC)	A.C.C., ULTRATECH, BIRLA, LAFARGE, JAYPEE CEMENT, SHREE CEMENT, J.K. CEMENT
2	WHITE CEMENT	J. K., BIRLA WHITE
3	REINFORCEMENT STEEL TMT Bars – Fe 500D or more	SAIL, RINL, JINDAL, ESSAR, JSW STEEL LTD, ISPAT, PARAS GOLD, KAMDHENU
4	CEMENT BASED WALL PUTTY	BIRLA WALL CARE, JK WHITE, ASIAN PAINTS, BERGER
5	ACRYLIC EMULSION PAINTS	ASIAN PAINTS/ ICI DULUX / NEROLAC/BERGER
6	CEMENT PRIMER	NEROLAC/BP WHITE (BERGER)/DECOPRIME-WT (ASIAN)/WHITE PRIMER (ICI)
7	ALUMINIUM SECTION	HINDALCO, JINDAL & INDIAN ALUMINIUM CO.
8	PRELAMINATED PARTICLE BOARD	GOOD QUALITY

Page 4 of 6


A

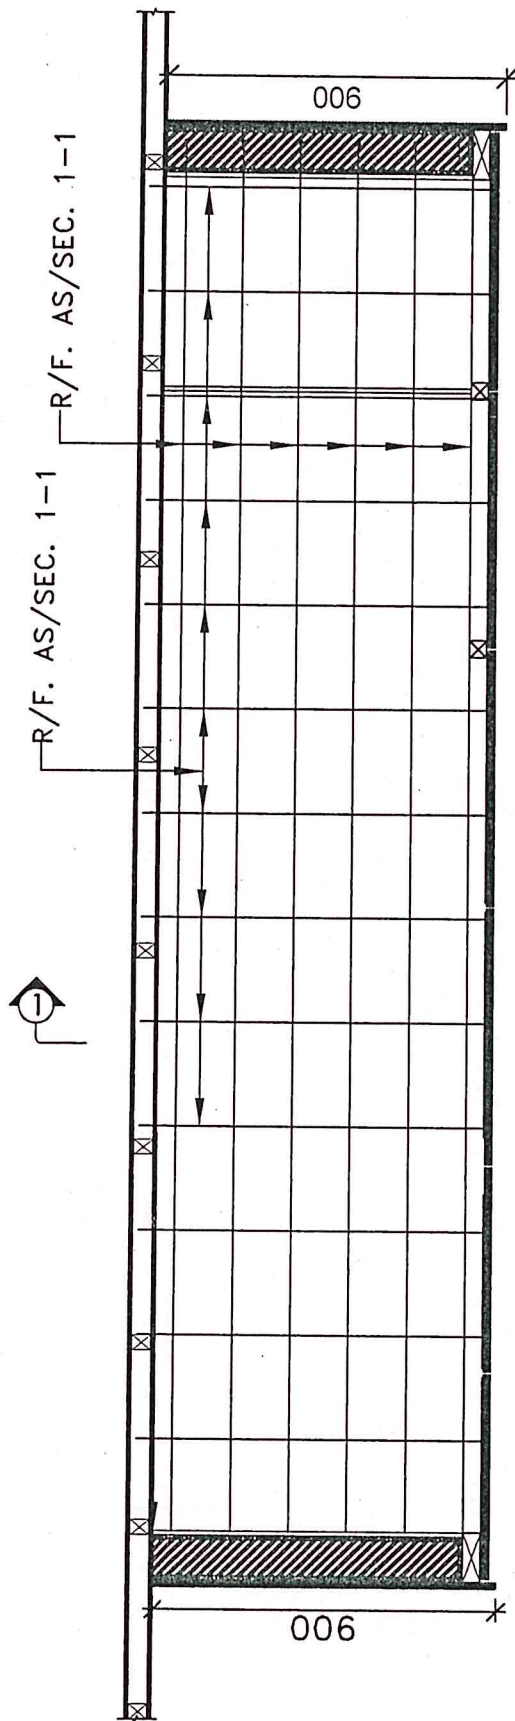

COUNTER PLAN

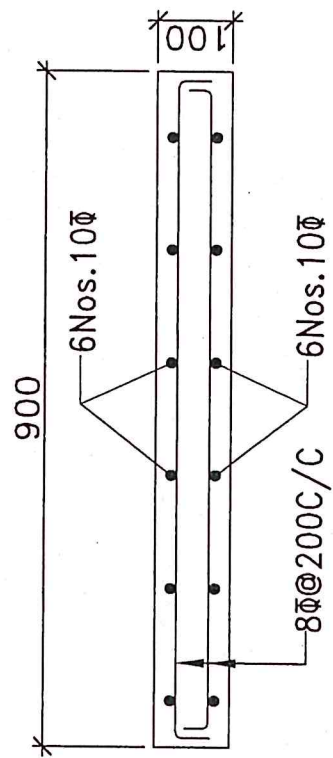

SECTION 1-1
CONC. MIX. M20

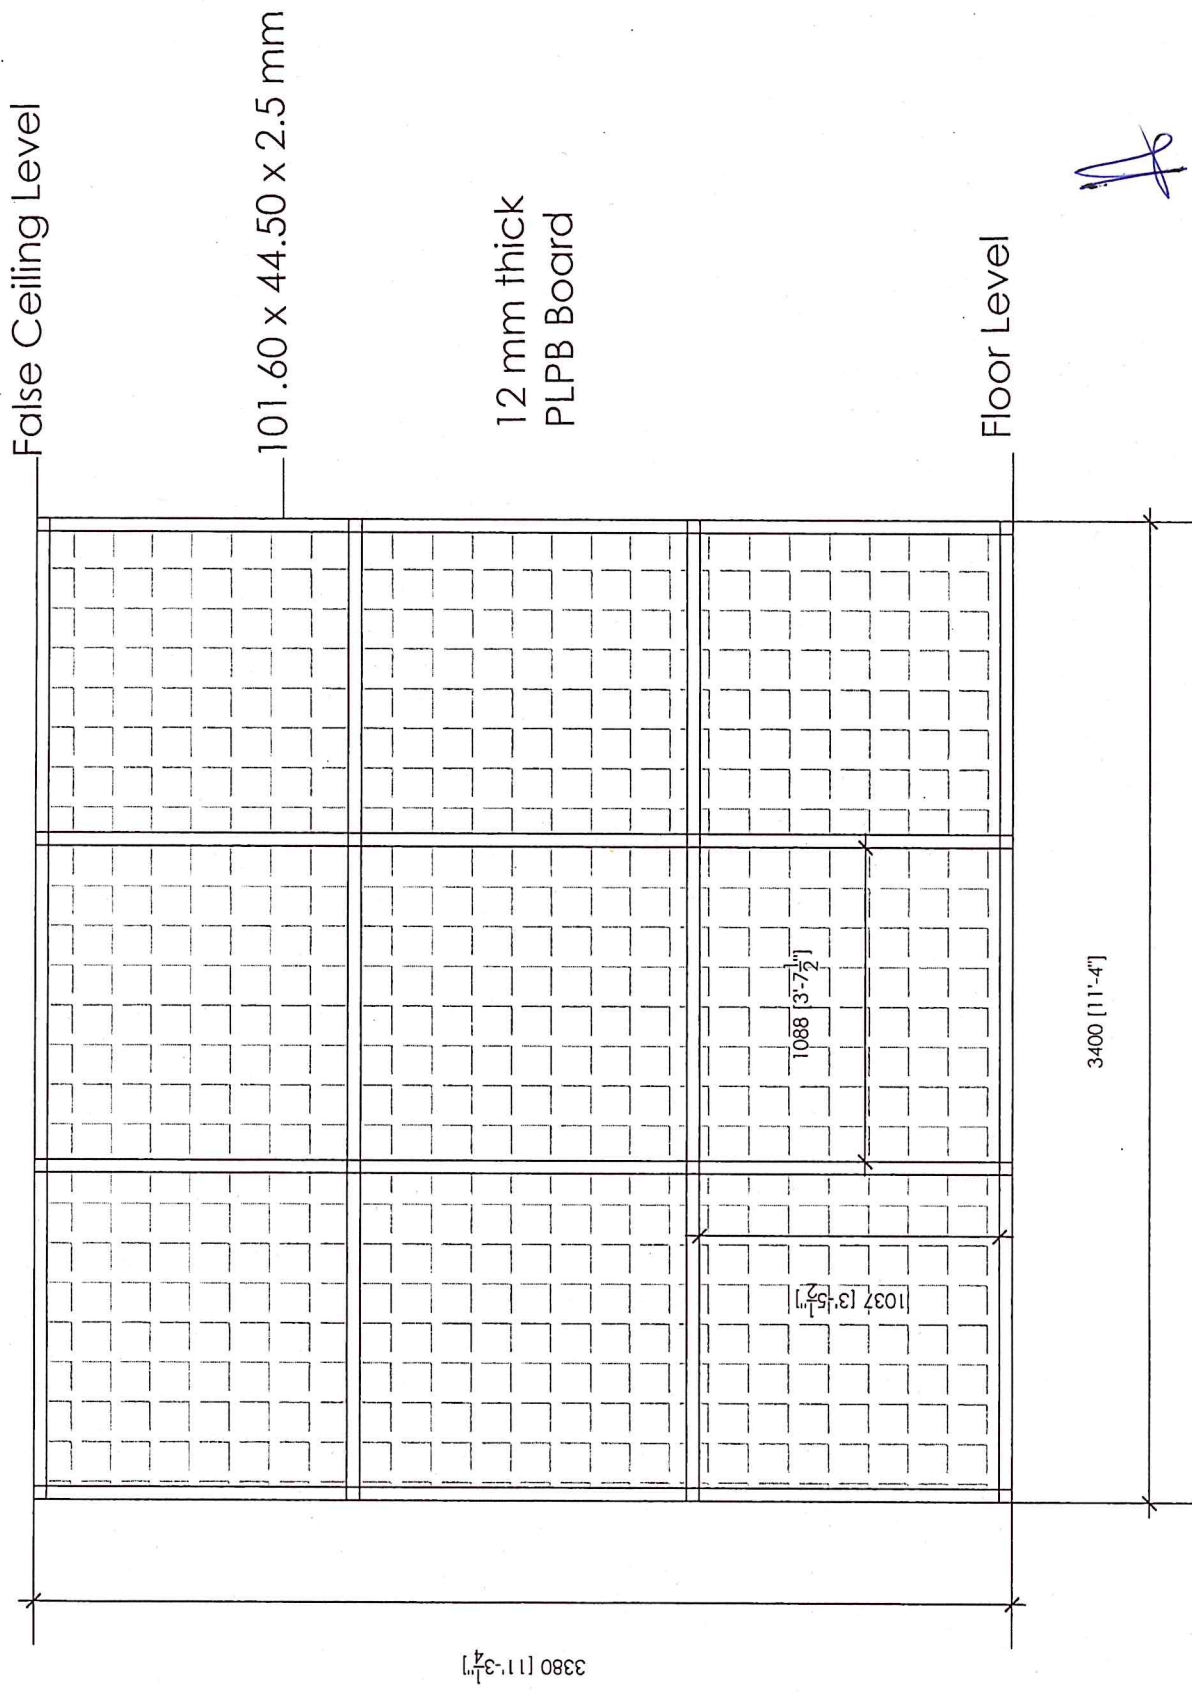

Elevation of Aluminium Partition work