



Ref. RGIPT/JAIS/IWD/QE/2024-25/04

Date: 10.03.2025

To,

M/s [Name of Agency/Contractor],

Address:

.....

Email-

Contact No.

GSTIN:


Sub: Quotation enquiry for providing and fixing of Concertina coil fencing on boundary wall and Painting of MS Grill work at RGIPT, Jais Campus.

Dear Sir,

We request you to submit your competitive rates (quotation) for providing and fixing of Concertina coil fencing on boundary wall and Painting of MS Grill work at RGIPT, Jais campus as per the attached BOQ as **Annexure - 1**.

Terms & Conditions:

- The quoted rate should be inclusive of **GST & Freight charges**. Agency is requested to only fill the required data in BOQ, no extra terms and condition should be mentioned by the Agency. If he does so, then the quotation of that agency will be summarily rejected.
- The quoted rate shall be valid for a period of 60 days from the last date of submission of quotation.
- GST number should be mentioned in the quotation.
- The total time for completion of work will be 25 days. The date of commencement shall be reckoned from the date of acceptance of Work Order.
- No advance payment will be made. The agency should inspect the site before quoting the rate.
- The quantity of items in BOQ is tentative which may change depending upon the site conditions. Mode of measurements will be as per Central Public Work Department (CPWD) specifications and Indian Standard (IS) codes.
- The work will be carried out as per satisfaction of Engineer-in-Charge.
- In case of any damage and delay in completion of work, liquidated damages (LD) at the rate of 0.5% of the work order value per week of delay or part thereof, subject to a maximum of 10% of the work order value shall be recovered from the agency/contractor bills.
- The quotation should be sent to us duly **Signed and Stamped** only in **Sealed Envelope** and Super scribed as **Ref. No. RGIPT/JAIS/IWD/QE/2024-25/04, Quotation for providing and fixing of Concertina coil fencing on boundary wall and Painting of MS Grill work at RGIPT, Jais Campus** by registered post or by hand to the office of The Chairman, Institute Works Department, Rajiv Gandhi Institute of Petroleum Technology Jais, Mukhetiya More , Harbanshganj , Tiloi , Amethi, UP - 229304.
- The quotation should be submitted within 10 days from the date of quotation enquiry i.e., the quotation should be received on or before 20.03.2025 by 04:00 PM. Quotation received after the due date, for whatever reason, will not be considered for evaluation.
- The order will be awarded to the Agency/Contractor, whose rate will be lowest in terms of the grand total.
- The Institute reserves the right to accept/reject all or any part of the offer without assigning any reason thereof.


Executive Engineer (Civil)

Rajiv Gandhi Institute of Petroleum Technology, Jais , Amethi

Name of Work :- Providing and fixing of Concertina Coil Fencing on boundary wall and Painting of MS Grill Work at RGIPT Campus area .

S. No.	Description	Unit	Qty.	Rate (Rs.)	Amount (Rs.)
1	Providing and fixing concertina coil fencing with punched tape concertina coil 600 mm dia 10 metre openable length (total length 90 m), having 50 nos roundsper 6 metre length, upto 3 m height of wall with existing angle iron 'Y' shapedplaced 2.4m or 3.00 m apart and with 9 horizontal R.B.T. reinforced barbed wire,stud tied with G.I. staples and G.I. clips to retain horizontal, including necessarybolts or G.I. barbed wire tied to angle iron, all complete as per direction of Engineer-in-charge, with reinforced barbed tape(R.B.T.) / Spring core (2.5mm thick) wire ofhigh tensile strength of 165 kg/ sq.mm with tape (0.52 mm thick) and weight 43.478gm/ metre (cost of M.S. angle, C.C. blocks shall be paid separately)	Rmt.	200.00		
2	Providing and fixing strctural steel work in single section of Y-shaped angle of size 50x50x5, over existing boundary wall grill for fixing concertina wire coil and horizontal wires as shown in sketch, enclosed herewith including cutting , hoisting, welding in position and applying a priming coat of approved steel primer all complete.	Kg.	98.40		
3	Painting with synthetic enamel paint of approved brand and manufacture to give an even shade : Two or more coats on work	Sqm	211.30		
A	Sub Total Amount (S.No. 1 to 3)				
B	GST @ 18% on 'A'				
C	Total Amount (A+ B)				

List of Preferred Makes		
S.No.	Materials	Manufacture/Brand/Make
1	Concertina Coil	Tata Steel
2	Structural Steel	Tata Steel, Sail, Jindal Steel & Power Ltd. , JSW Steel Ltd.
3	Synthetic Enamel Paint	Asian Paints: Apcolite Premium Gloss Enamel, Nerolac: Synthetic Hi Gloss , Berger : Luxol Hi Gloss, ICI Dulux: Gloss Synthetic Enamel



DRAWING

Y-shape Angle section


Spiral Concentric Coil

Horizontal Reinforced Barbed Tape Wire (RBT Wire)

MS Grill

Brick wall

Concentric coil over RBT Biogas plant Boundary Wall area

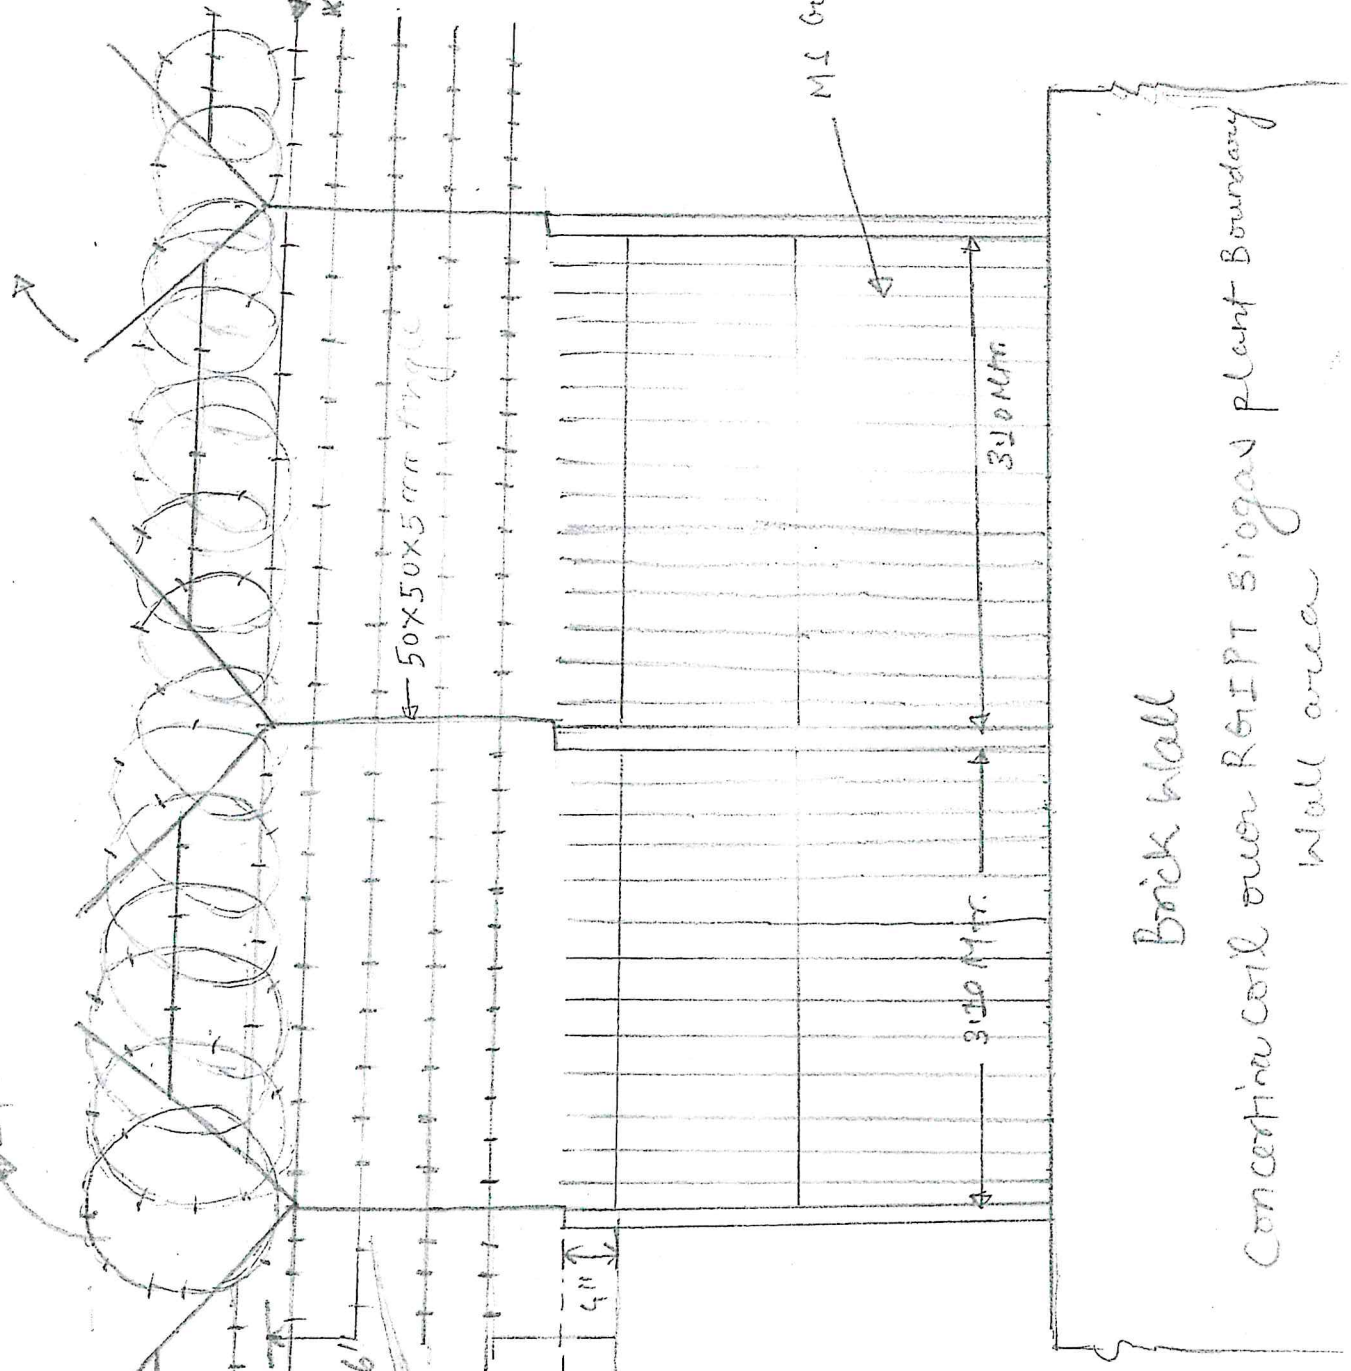

Reerush

Bygt

Angle (50x50x5) mm



40mm

500mm

320mm

320mm

4"

16"

50x50x5mm angle