



Ref. RGIPT/JAIS/HO/QE/2025-26/03

विद्यारत्नम् महस्दनम्

Date: 24.02.2026

To,

M/s [Name of Agency/Contractor],

Address:

.....

Email-

Contact No.

GSTIN:

Sub: Quotation enquiry for Construction of Box Cricket Court and Box Football Court at RGIPT, Jais Campus.

Dear Sir,

We request you to submit your competitive rates (quotation) for Construction of Box Cricket Court and Box Football Court at RGIPT, Jais campus as per the attached BOQ as **Annexure - 1**.

Terms & Conditions:

- The quoted rate should be inclusive of all components, such as **GST & Freight charges**. Agency is requested to only fill the required data in BOQ, no extra terms and condition should be mentioned by the Agency. If he does so, then the quotation of that agency will be summarily rejected.
- The quoted rate shall be valid for a period of 60 days from the last date of submission of quotation.
- Copy of GST Certification should be enclosed by vendor along with quotation.
- The total time for completion of work will be 30 days. The date of commencement shall be reckoned from the date of acceptance of Work Order.
- No advance payment will be made. The agency should inspect the site before quoting the rate. The quantity of items in BOQ is tentative and payment will be made on basis of actual measurement of executed work.
- The work will be carried out as per BOQ, drawings, technical specifications and satisfaction of Engineer-in-Charge. (**Annexure-1 & 2**).
- The agency should have successfully completed similar type of works during last 3 (Three) years ending on 31st July 2025. (**Annexure-3**).
- In case of any damage and delay in completion of work, liquidated damages (LD) at the rate of 0.5% of the work order value per week of delay or part thereof, subject to a maximum of 10% of the work order value shall be recovered from the agency/contractor bills.
- The quotation should be sent to us duly **Signed and Stamped** only in **Sealed Envelope** and Super scribed as **Ref. No. RGIPT/JAIS/HO/QE/2025-26/03, Quotation for Construction of Box Cricket Court and Box Football Court at RGIPT, Jais Campus** by registered post or by hand to the office of Head Warden, Hostel Office, Rajiv Gandhi Institute of Petroleum Technology Jais, Mukhetiya More, Harbanshganj, Tiloi, Amethi, UP - 229304.
- The quotation should be submitted within 10 days from the date of quotation enquiry i.e., the quotation should be received on or before 06.03.2025 by 04:00 PM. Quotation received after the due date, for whatever reason, will not be considered for evaluation.
- The order will be awarded to the Agency/Contractor, whose rate will be lowest in terms of the grand total.
- The Institute reserves the right to accept/reject all or any part of the offer without assigning any reason thereof.

Adarsh
Swastang
Assistant Engineer (Civil) 24.02.26

Page No. 01

BOQ for Construction of Box Cricket Court and Football Court in Hostel Area					
S. No.	Description of Item	Unit	Quantity	Rate (Rs.)	Amount (Rs.)
1	<p>Box Cricket Court : Design, Fabrication, Supply, Erection and Installation of Box Cricket Court structure including GI/MS framework, removal nylon netting from Old Box on sides & top, two MS entry gates, internal electrical wiring with 2.5 sq.mm armoured cable, installation of 8 nos. 200W LED flood lights, and 25A 2P GI Box MCB-based control panel. Complete with all materials, labour, T&P, testing & commissioning as per approved specifications. Court Area: Approx. 5700 Sqft. (L = 114 feet , W = 50 feet , H = 19 feet)</p>	Sqft	5700.00		
2	<p>Box Football Court: Design, Fabrication, removal and refixing of existing fabrication, Supply, Erection and Installation of Box Football Court structure including GI/MS framework, installation of nylon netting on sides with 2.5 mm thickness & top 1.5 mm area, make provision of two nos. of MS entry gates, internal electrical wiring with 2.5 sq.mm armoured cable, installation of 10 nos. of 200W LED flood lights, and 25A 2P GI Box MCB-based control panel. Complete with all materials, labour, T&P, testing & commissioning as per approved specifications. Court Area: Approx. 8320 Sqft. (L = 130 feet, W = 64 feet , H = 23 feet)</p>	Sqft	8320.00		
A	Sub Total Amount (S.N. 1 to 2)				
B	GST @ 5% on Sub Total				
C	Total Amount (A + B)				

Delavith

Technical Specification of Construction of Box Cricket Court

Design, Fabrication, Supply, Erection and Installation of Box Cricket Court structure including GI/MS framework, removal nylon netting from Old Box court from sides & top portion, make provision of two MS entry gates, internal electrical wiring with 2.5 sq.mm armoured cable, installation of 200W LED flood lights, and 25A 2P GI Box MCB-based control panel. Complete with all materials, labour, T&P, testing & commissioning as per approved specifications.

Court Area: Approx. 5700 Sqft. (L = 114 feet , W = 50 feet , H = 19 feet)

a) Fabrication of horizontal ms square pipe of size 50 mm , thickness 2 mm with already grouted square vertical pole of 72 mm at site and fabrication of two ms entry gate with opening of (3.5 x 6) sqft.

b) Installation of 200W LED flood lights with internal electrical wiring with 2.5 sq.mm armoured cable , and 25A 2P GI Box MCB-based control panel for controlling the lighting mechanism.

Qty. of 200 W LED Flood Lights = 8 Nos.

c) Removal of nylon netting from Old Box Court area approx. 530 sqm and re-installation of same on another locations apart from this if there is shortage of said material on new site , supply and installation of new nylon netting.

The sides of nylon netting of thickness of 2.5 mm and in top portion with 1.5 mm thickness.

Technical Specification of Construction of Box Football Court

Design, Fabrication, removal and refixing of existing fabrication, Supply, Erection and Installation of Box Football Court structure including GI/MS framework, installation of nylon netting on sides with 2.5 mm thickness & top 1.5 mm area, make provision of two nos. of MS entry gates, internal electrical wiring with 2.5 sq.mm armoured cable, installation of 10 nos. of 200W LED flood lights, and 25A 2P GI Box MCB-based control panel. Complete with all materials, labour, T&P, testing & commissioning as per approved specifications.

Court Area: Approx. 8320 Sqft. (L = 130 feet, W = 64 feet , H = 23 feet)

a) Dismantling, removal and refixing of existing MS fabrication of Box Football Court, grouting of vertical pole of height of with anchor bolting system and make provision of two nos. of ms entry gate for said court, complete with labour, tools and incidental charges.

b) Fabrication of 40 mm, thickness 2 mm, ms round/square shape pipe with anchored bolted round shape vertical pole at site and fabrication of two entry gate with opening of (3.5 x 6) sqft.

c) Installation of 200W LED flood lights with internal electrical wiring with 2.5 sq.mm armoured cable , and 25A 2P GI Box MCB-based control panel for controlling the lighting mechanism.

Qty. of 200 W LED Flood Lights = 10 Nos.

d) Supply and installation of nylon netting for Box Football Court area with side portion of court with nylon netting of thickness of 2.5 mm and in top portion with 1.5 mm thickness.

Court area : 8320 Sqft. (L = 130 feet , W = 64 feet, H= 23 feet)

DETAILS OF SIMILAR NATURE WORK

Details of Civil and Electrical work / order executed during last 3 years ending 31.07.2025 (Please submit copy of completion certificate from the client.


S. No.	Name of Work	Authority under whom the work has been executed	Agreement / Acceptance letter reference with date of issue	Value of work as per agreement/ acceptance	Date of actual completion of work / extended date of completion	Value of the work completed	Supporting Document

Relevants


Page No- 04

MS square pipe of 75mm

MS square pipe of 50mm

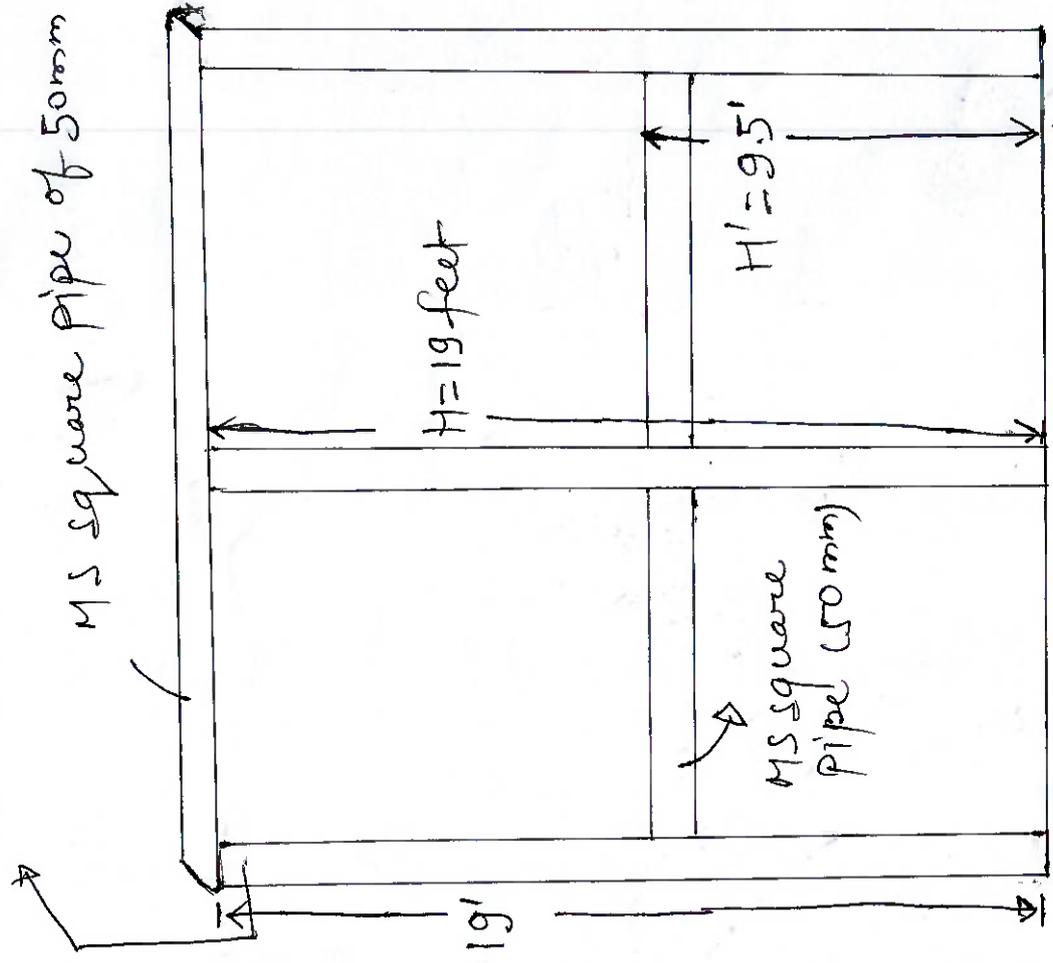



Elevation of Box
Cricket Court

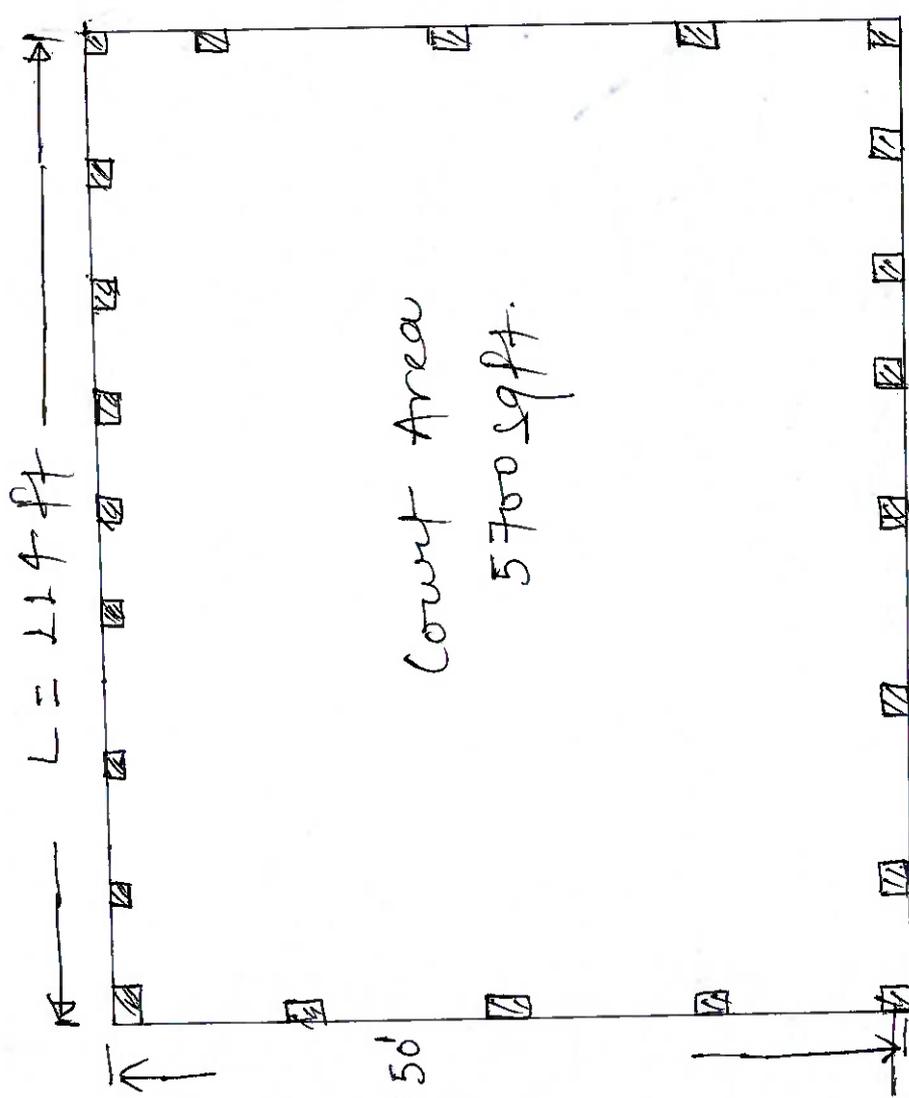

Cricket Area
5700 sq ft.

Location of vertical pole already provided at site (75 mm)
Plan of Box - Cricket Court

Delaware

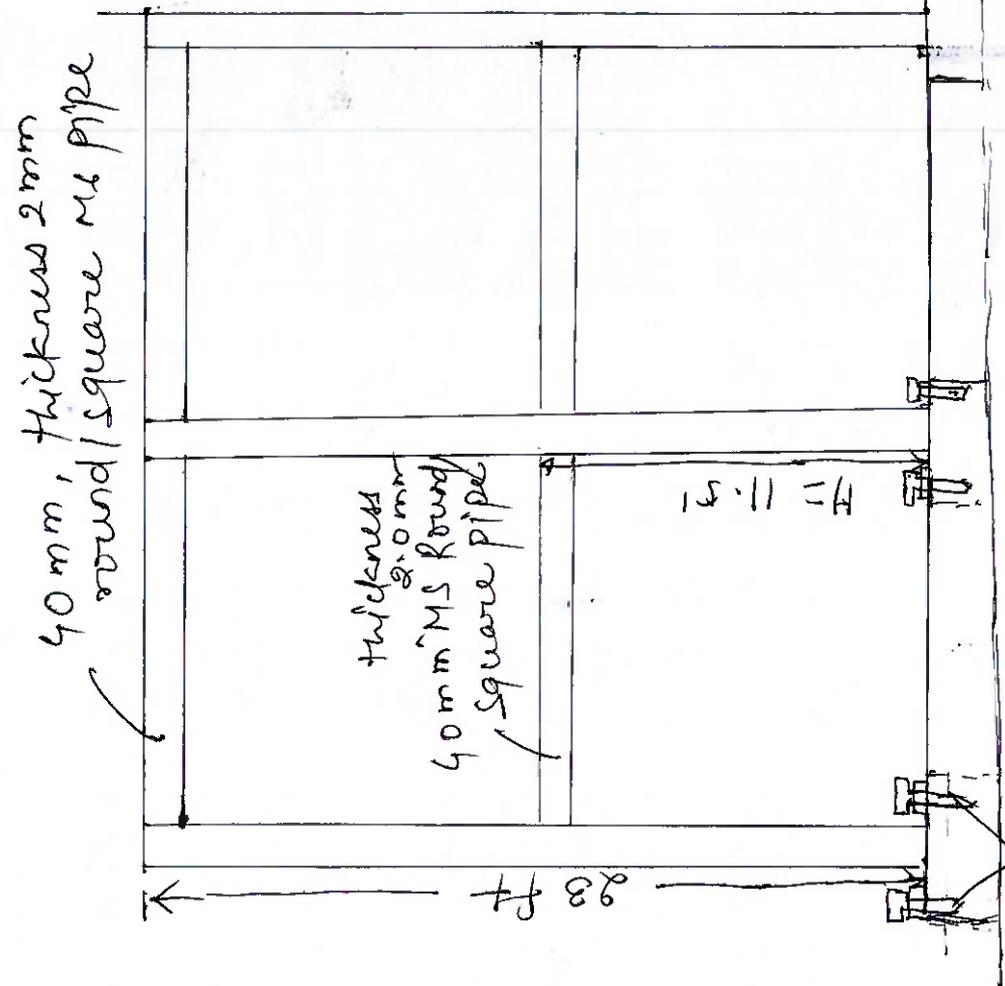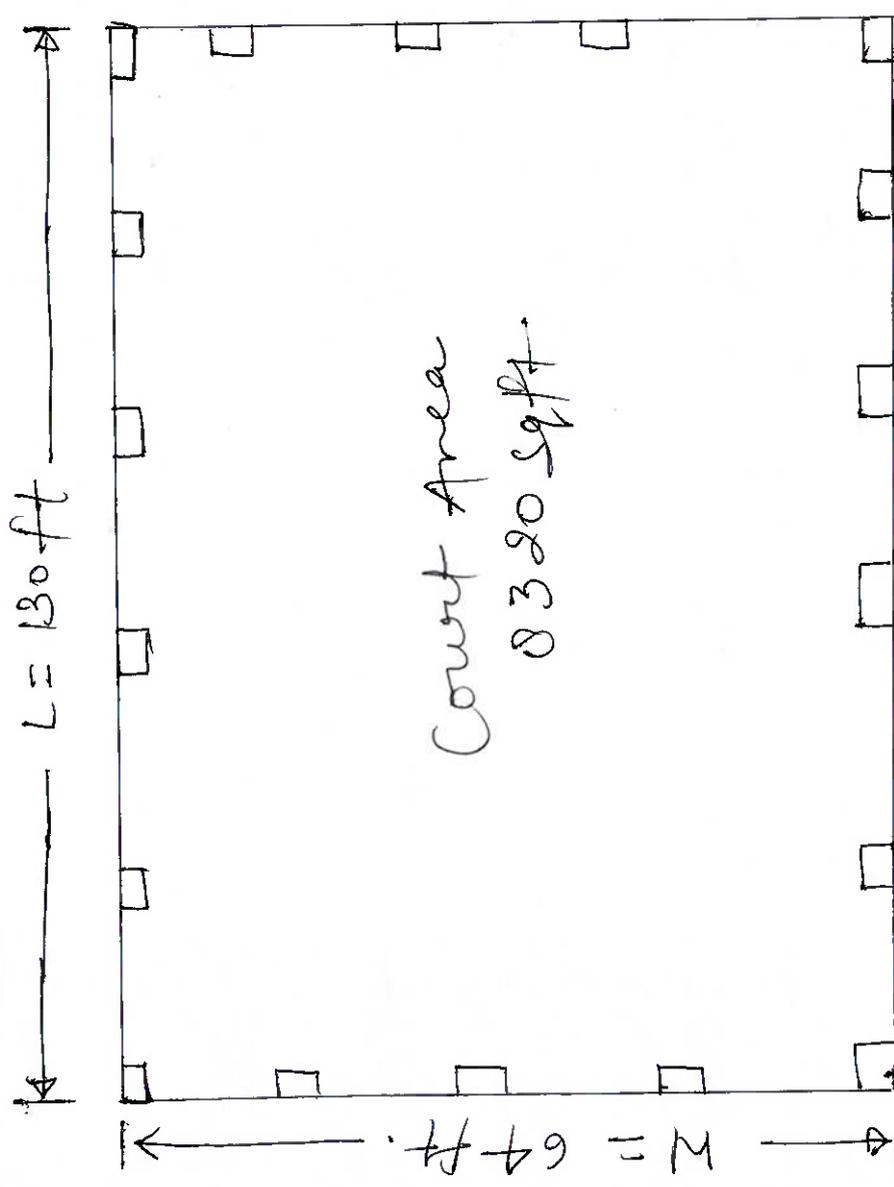

Anchors
 bolted
 system.
 Fireproof
 Protection

Plan of BOX Football Court

Radarkh